

Gladius


Gladius, with its injection-molded die-cast aluminum housing, is developed with a robust hospitality solution designed to withstand the harshest operating environment. The housing itself is spill-proof, and acts as a "heat-sink" to ensure all internal electronics operate at the lowest temperature. Also, the Gladius is protected against the ingress of dirt and dust, which ensures the highest possible quality and reliability.



- Robust aluminum die-casting housing construction
- Integrated options for secure identification devices, such as i-Button, RFID, or Fingerprint
- Considerate I/O connection design, which allows device cables to be hidden inside the system base and therefore enhances the cable attachment



I/O Connector Panel

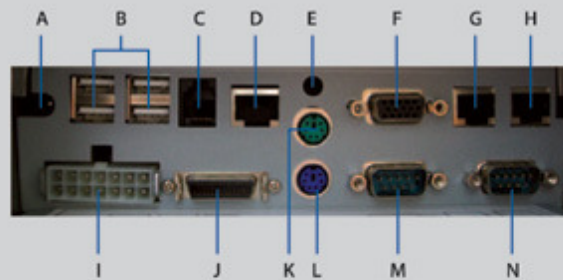

- | | |
|----------------|-------------|
| A. DC 12V Out | I. Power In |
| B. USB | J. LPT 1 |
| C. Cash Drawer | K. Mouse |
| D. LAN | L. K/B |
| E. Audio Out | M. COM2 |
| F. VGA | N. COM1 |
| G. COM5 | |
| H. COM4 | |

Specifications

Model	H-740	H-745
Processor	Intel Celeron 2GHz / Pentium 4 2.4GHz (socket 478)	
Memory	256MB standard, maximum 1GB (1 x 184-pin DDR)	
Touch LCD Display		
Size / Resolution	12" TFT LCD / 800 x 600	15" TFT LCD / 1024 x 768
Brightness	200 cd/m ²	250 / 350 cd/m ²
Touch Screen	5 / 4 wire Resistive	
I/O Connectivity		
Serial Port	<ul style="list-style-type: none"> • 3 x External : COM1, COM2 (D-Sub), COM4 & COM5 (RJ45) for VFD & 2nd Display Touchscreen • 1 x Internal : COM3 for Primary Touchscreen 	
Parallel Port	1 x Bi-directional Parallel port	
Standard USB Port	6 x USB 2.0 (4 x external, 2 x internal)	
Cash Drawer Port	1 x 12V RJ11 (single/dual)	
Keyboard Port	1 x PS/2 keyboard	
Mouse Port	1 x PS/2 Mouse	
LAN Port	1 x RJ45 10/100 Base-T	
VGA Port	1 x VGA port for 2nd LCD Display	
Audio Port	1 x Line-out	
IDE Hard Disk Drive	Built-in 3.5" type	
Compact Flash	CF Socket onboard	
Speaker	Integrated 3W stereo speakers	
Power Supply	250W External Power Supply	
Construction	Aluminum Die-casting Housing	
Housing Color	Black/ Silver	
O/S Supported	Windows 2000, XP, XPE, WEPOS	
Dimensions (W x H x D)	310 x 270 x 248 mm	
Weight	15 Kgs	
EMI/Safety	CE EMC, CE LVD, FCC, CCC, RoHS	
Operating Temperature	0°C ~ 35°C	
Optional Peripherals		
Magnetic Stripe Card Reader	Integrated MCR single/dual/triple Track	
MCR 2-in-one / MCR 3-in-one	Integrated MCR+I-Button/MCR+RFID/MCR+Fingerprint/MCR+Smartcard+I-Button	
2nd Touch LCD Display	12.1" TFT LCD (Resistive Touch/Non-touch)	
Customer Pole Display	Integrated VFD/LCD Customer Pole Display	

FEC

FIRICH ENTERPRISES CO., LTD.
10F., No.75, Sec. 1, Sin Tai Wu Rd., Sijhih City,
Taippei County 221, Taiwan R.O.C.
tel + 886 2 2698 1446 fax + 886 2 2698 1451
www.firich.com.tw

Firich China-Crisom
Room 1508, No. 818, NanJing(West) Road,
JingAn District, ShangHai City, China (Post Code : 200041)
tel + 86 21 5109 6766 fax + 86 21 2301 0268
www.firich.com.cn

Firich Korea Inc.
506 Daerung, 8th Kasan-Dong,
481-11 Geumcheon, Seoul, Korea
tel + 82 2 837 6610 fax + 82 2 837 8070
www.firich.co.kr

Firich USA Inc.
41668 Christy Street, Fremont, CA 94538, USA
tel + 1 510 683 9188 fax + 1 510 683 9288
sales@firichusa.com
www.firichusa.com

